


## Bluetooth™ module

The **BTM1000H** is a miniature device for use in embedded systems that provides short-range wireless connectivity between Bluetooth-enabled devices for applications such as file transfer, ad-hoc networking, device synchronization, peripheral connectivity and a bridge to the Internet.

The **BTM1000H** uses radio frequency, hence, voice and data are transmitted almost immediately. Bluetooth™ transmission not only ensures protection from interference, but also secures data transfers. It helps people share and access information that's important to them more easily.

The **BTM1000H** is a Class 1 Bluetooth module that features high power providing a communication range up to 100 meters.

Link your notebook with your handheld, mobile phone, printer and other Bluetooth™ devices within your personal area network (PAN) via a secure short-range wireless radio link. Get rid of all those troublesome cables and automatically share documents, browse the Internet and synchronize calendars, address books and more.

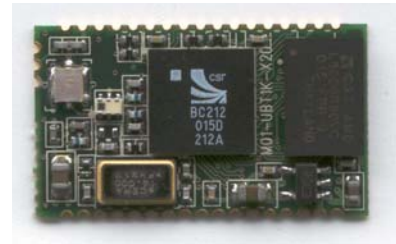

### FEATURES

- Fully compliant with Bluetooth Version 1.1.
- Uses 2.4 GHz ISM frequency band.
- High-speed Wireless Transmissions, up to 723 Kbps Data Throughput.
- Enable wireless connectivity between a notebook computer and other Bluetooth devices.
- High power Bluetooth radio provides a communication range of up to 100 meters.
- Provides a high degree of security for communications between Bluetooth devices.
- The very small Bluetooth module makes designing a Bluetooth-enabled product easily.



## SPECIFICATIONS

<b>Standards</b>	Bluetooth Version 1.1
<b>Chipset</b>	CSR BlueCore 2 solution
<b>Antenna</b>	Build in the card
<b>Frequency Range</b>	2.4000-2.4835 GHz
<b>Number of Selectable Channels</b>	79 channels
<b>RF Technique</b>	Frequency hopping spread spectrum(FHSS)
<b>Security</b>	Data encryption up to 128-bits
<b>Topology</b>	8 devices,point-to-multipoint
<b>Interface Signals Provided</b>	<ul style="list-style-type: none"> <li>▪ USB Interface signals(full-speed 12Mbps speed of USB spec. 1.1)</li> <li>▪ UART interface signals</li> <li>▪ PCM Codec interface signals</li> </ul>
<b>Output Power</b>	Output power meets Class 1(1mW-100mW) requirements
<b>Sensitivity</b>	-75dBm
<b>Range</b>	Devices connect for access and data sharing within ranges up to 320 feet (100 meters)
<b>Power Consumption</b>	Operating Voltage: 3.3V, 195mA (Max)
<b>Physical Specifications</b>	<ul style="list-style-type: none"> <li>▪ Weight: 2 g</li> <li>▪ Dimension: 25 (L) x 14.5 (W) mm</li> </ul>
<b>Environment Specifications</b>	<ul style="list-style-type: none"> <li>▪ Operating Temperature: 0~65°C ambient temperature</li> <li>▪ Storage Temperature: -20~75°C ambient temperature</li> <li>▪ Operating humidity: 95% maximum (non-condensing)</li> <li>▪ Storage humidity: 95% maximum (non-condensing)</li> </ul>

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>