

## ControlCenter 200/300

### Series of Keyboards

#### Features That Make a Difference:

- Choice of models with variable-speed and vector-solving joysticks
- Selectable keyboard protocols, RS-232 or ADnet (RS-485), for control of various matrix switching systems
- LCD with adjustable contrast
- Tactile, color-coded elastomeric keys
- Preset, pattern, and auxiliary control
- Lens, tour, salvo, and alarm control
- DirectSet dome function control
- Passcode protection for programming functions
- ADnet (RS-485) mode
- RS-485 control of MegaPower LT
- Direct control of RS-232 devices via remappable keys
- RS-232 for MegaPower 48 Plus and MegaPower 3200 systems
- Video recorder control (DVRs and VCRs)



**ControlCenter 200<sup>1</sup>**



**ControlCenter 300**

ControlCenter 200/300 Keyboards are robust, full-function system keyboards compatible with the MegaPower family of matrix switcher/controller systems. These keyboards feature color-coded elastomeric keys that have a true tactile feel. Cameras, presets, patterns, views, and auxiliaries are all easily controlled. All system activities, including tours, salvos and alarms, can be controlled directly from the keyboard.

The keyboards offer recorder control for VCRs and digital video recorders (DVRs). The keyboards' vector-solving joystick provides one-handed control of the selected fixed or variable-speed pan/tilt or dome. ControlCenter 300 keyboards also provide twist-to-zoom control of motorized lenses.

With either model, you can select ADnet (RS-485) control for MegaPower LT or RS-232 control for MegaPower 48 Plus and MegaPower 3200 systems. The keyboards have adjustable baud rates to properly match the requirements of the matrix switcher/controller system. In addition, ControlCenter 200 is an operator keyboard, providing no system or camera programming capabilities, when used with MegaPower 48 Plus and MegaPower 3200 systems.

Both ControlCenter keyboards support the DirectSet dome control function. Using a dedicated key, you can easily bring up the dome camera function menu and change the setting or enter the function number directly to quickly change the setting (e.g. change from day mode to night mode).

(1) ControlCenter 200 Keyboard is operate only; does not include programming access.

**Model Numbers**

- ADCC0200\* . . . . . Keyboard, ControlCenter, RS-485, two-axis joystick, desktop, no power supply
- ADCC0300\* . . . . . Keyboard, ControlCenter, RS-485, three-axis joystick, desktop, no power supply
- ADCC0200P . . . . . Keyboard, ControlCenter, RS-485/RS-232, two-axis joystick, desktop, 100-240 VAC
- ADCC0300P . . . . . Keyboard, ControlCenter, RS-485/RS-232, three-axis joystick, desktop, 100-240 VAC
- ADCCACPSP . . . . . Keyboard, accessory, remote kit, power supply and interface, 100-240 VAC

\*A single keyboard can receive power directly from a MegaPower LT. Additional keyboards require a remote kit when they are used with MegaPower 48 Plus and MegaPower 3200.

**Connectors**

- RS-232 or RS-485
- Power . . . . . One RJ-45 to switcher/controller system via terminal block  
One RJ-45 for RS-485 loop through connection

**Electrical**

- Supply Voltage . . . . . 120/230 VAC, 50/60 Hz
- Input Voltage . . . . . 12 VDC
- Power Consumption . . . . . 3 VA max

**Mechanical**

- Dimensions (H x W x D) . . . . . 80 x 340 x 132 mm (3.1 x 13 x 5.2 in)
- Unit Weight . . . . . 1.50 kg (3.3 lbs)
- Shipping Weight . . . . . 2.50 kg (5.5 lbs)
- Color . . . . . Black

**Environmental**

- Operating Temperature . . . . . 0° to 50° C (32° to 122° F)
- Humidity . . . . . 10 to 90% RH (noncondensing)
- Storage Temperature . . . . . -20° to 60° C (-4° to 140° F)
- Humidity . . . . . 10 to 90% RH (noncondensing)

**Regulatory**


- Emissions . . . . . FCC Part 15, Subpart B, Class A  
CE: EN50081-1
- Immunity . . . . . CE: EN50130-4
- Safety . . . . . UL2044  
CSA 22.2 No. 1 (cUL)  
CE: EN60950

**Product Compatibility**


- ADnet (RS-485) Mode . . . . . MegaPower LT
- RS-232 Mode . . . . . MegaPower 48 Plus, MegaPower 3200

**Basic System Diagram**

**RS-485 Mode**

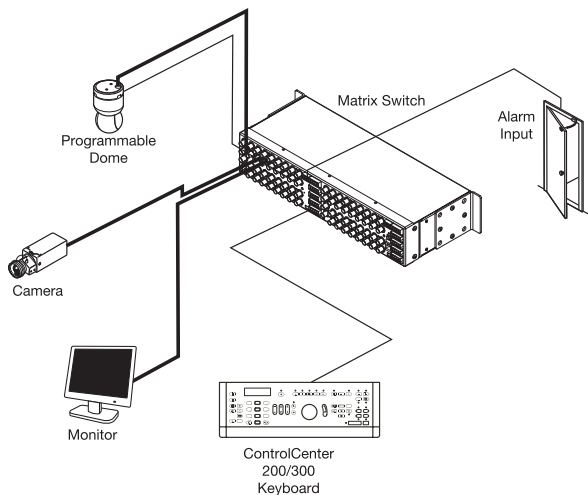

**RS-232 Mode**

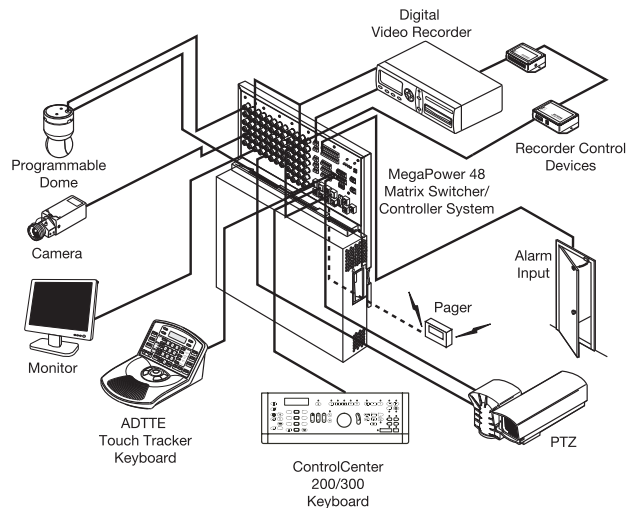

Product offerings and specifications are subject to change without notice. Actual products may vary from photos. Not all products include all features. Availability varies by region; contact your sales representative. Certain product names mentioned herein may be trade names and/or registered trademarks of other companies.

© 2008 Tyco International Ltd. and its respective companies. All rights reserved. AD0119-DS-200801-R01-LT-EN



## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>